

UNIC

UR-A220^{series}

2.44t-m 2,220kg at 1.1m capacity

Light-duty cargo-deck-mounted UNIC Crane



Both can be adjusted to fit compactly into the bed of a light-duty truck and leave room for ample cargo. The super-stable horizontal outrigger permits "one-touch" extension by removing the stopper, simplifying operation.

These series, too, are designed for optimal operating and energy efficiency and offer our popular Radio-remote control and a service port as options. High quality, operating ease, and dependable support for your light-duty operations.

Photo : UR-A224 / 4 section boom

FURUKAWA UNIC CORPORATION

Designed for easy, efficient operation



Easy start-up

Starting crane operations is so easy. Until now, starting up meant attaching the hook by hand — a real nuisance. With the UR-A220 series you can raise the boom and start operations with the hook still stowed, thanks to its unique UNIC features.




Automatic hook block stow

By winding up the hoist winch lever on the wind-up side you can stow the hook in the boom top*, thanks to UNIC's convenient built-in system. After stowing the hook, simply lower the boom to its normal position. Thanks to this exclusive UNIC feature, crane operations are finished faster than ever.

* Since hook stowing is impossible if the boom angle exceeds 15°, be sure to conduct crane operations when hook stowing is under 15°.

Overwinding alarm

The device automatically makes an alarm sound to warn that the wire rope is overwound when the hook comes close to the boom top.




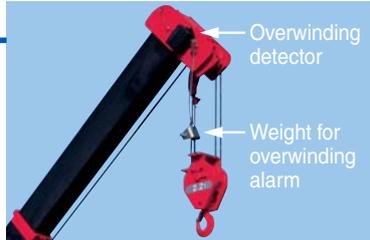


Automatic Accelerator (A.A.) lever

The crane operation lever controls the accelerator. By simply engaging the A.A. lever the operator can control speed without using the accelerator lever. One-handed operation is easy for everything from very slow-speed idling to full-throttle high-speed operations.




Working Range & Rated Loads [Unit : kg]

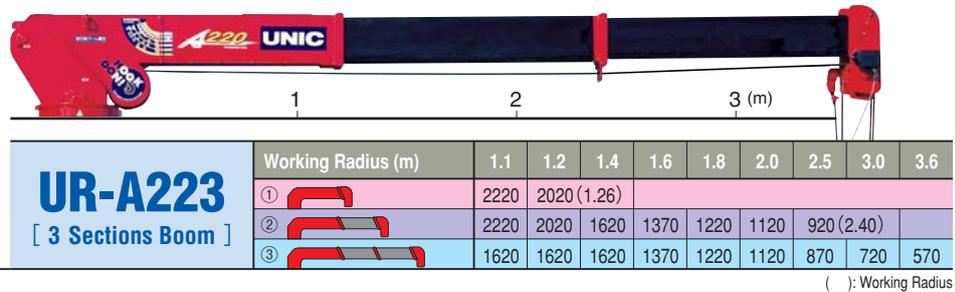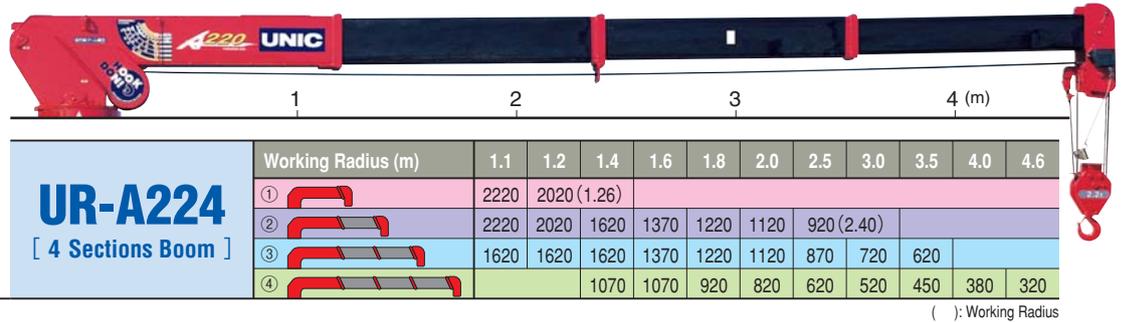

Specifications Table

	UR-A224	UR-A223
Capacity	2,220 kg at 1.1 m	2,220 kg at 1.1 m
Working radius	Min. 0.32 m to Max. 4.6 m	Min. 0.32 m to Max. 3.6 m
Hook height above ground level (approx)	Max. 5.8 m	Max. 4.8 m
Boom length	Min. 1.52 m to Max. 4.86 m	Min. 1.52 m to Max. 3.86 m
Boom section	4	3
Boom raising range	Min. 0° to Max. 75°	Min. 0° to Max. 75°
Slewing range	360° continuous	360° continuous



In accordance with our policy of constant product improvement, all specifications are subject to change without notice or obligations.

FURUKAWA UNIC CORPORATION

5-3, Nihonbashi 1-chome, Chuo-ku, TOKYO 103-0027 JAPAN
 Phone: (81-3) 3231-8613 / Facsimile: (81-3) 3231-8261
 URL <http://www.furukawaunic.co.jp/>