

UNIC




V370

Truck-Mounted UNIC Crane UR-V370 SERIES
For Medium-Duty truck.


maximum lifting capacity. **3,030 kg.**

15.9 m. *maximum hook height
(6 section boom).*

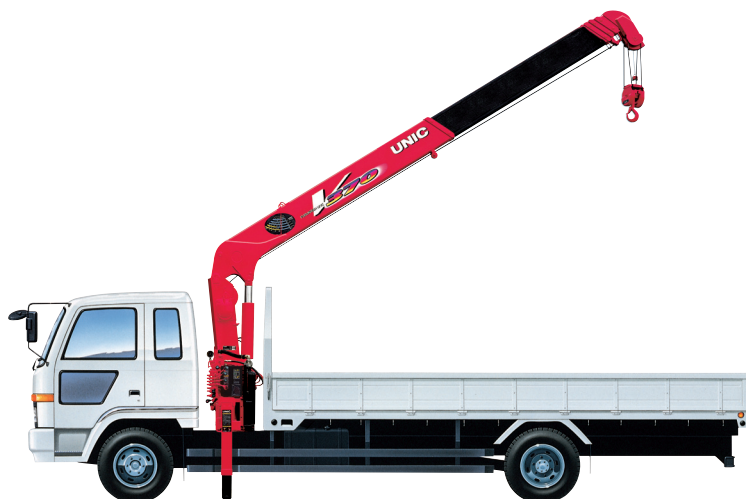

FURUKAWA UNIC CORPORATION


UNIC UR-V370 Series Line-up

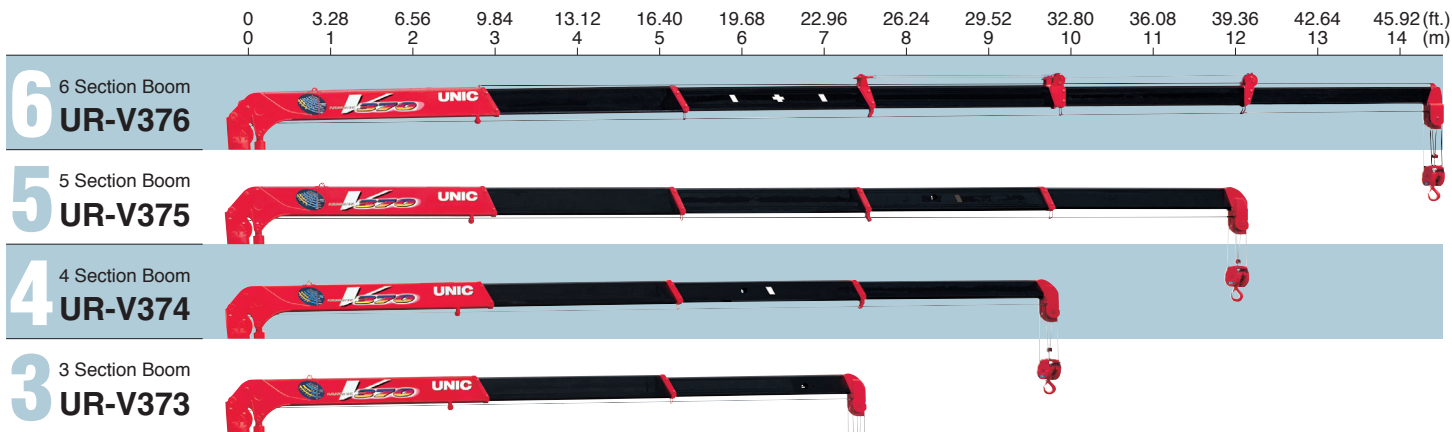

Specifications Table


UR-V370 series		UR-V376	UR-V375	UR-V374	UR-V373
Maximum Lifting Capacity	lbs.	6,670 lbs. at 7.87 ft.	6,670 lbs. at 7.87 ft.	6,670 lbs. at 8.53 ft.	6,670 lbs. at 8.56 ft.
	kg.	3,030 kg. at 2.4 m.	3,030 kg. at 2.4 m.	3,030 kg. at 2.6 m.	3,030 kg. at 2.7 m.
Maximum Hook Height	ft.	Max. 52.15 ft.	Max. 44.94 ft.	Max. 37.39 ft.	Max. 30.18 ft.
	m.	Max. 15.9 m.	Max. 13.7 m.	Max. 11.4 m.	Max. 9.2 m.
Maximum Working Radius	ft.	Min. 2.39 ft. to Max. 47.29 ft.	Min. 2.33 ft. to Max. 39.72 ft.	Min. 2.20 ft. to Max. 32.18 ft.	Min. 2.13 ft. to Max. 24.63 ft.
	m.	Min. 0.73 m. to Max. 14.42 m.	Min. 0.71 m. to Max. 12.11 m.	Min. 0.67 m. to Max. 9.81 m.	Min. 0.65 m. to Max. 7.51 m.
Boom Length	ft.	Min. 11.91 ft. to Max. 47.92 ft.	Min. 11.61 ft. to Max. 40.34 ft.	Min. 11.19 ft. to Max. 32.80 ft.	Min. 10.86 ft. to Max. 25.26 ft.
	m.	Min. 3.63 m. to Max. 14.61 m.	Min. 3.54 m. to Max. 12.30 m.	Min. 3.41 m. to Max. 10.00 m.	Min. 3.31 m. to Max. 7.70 m.
Boom Sections		6	5	4	3
Boom Raising Angle		Min. 1° to Max. 78°			
Slewing Angle		360° Continuous			

Drawing: UR-V374 (Unit: mm)

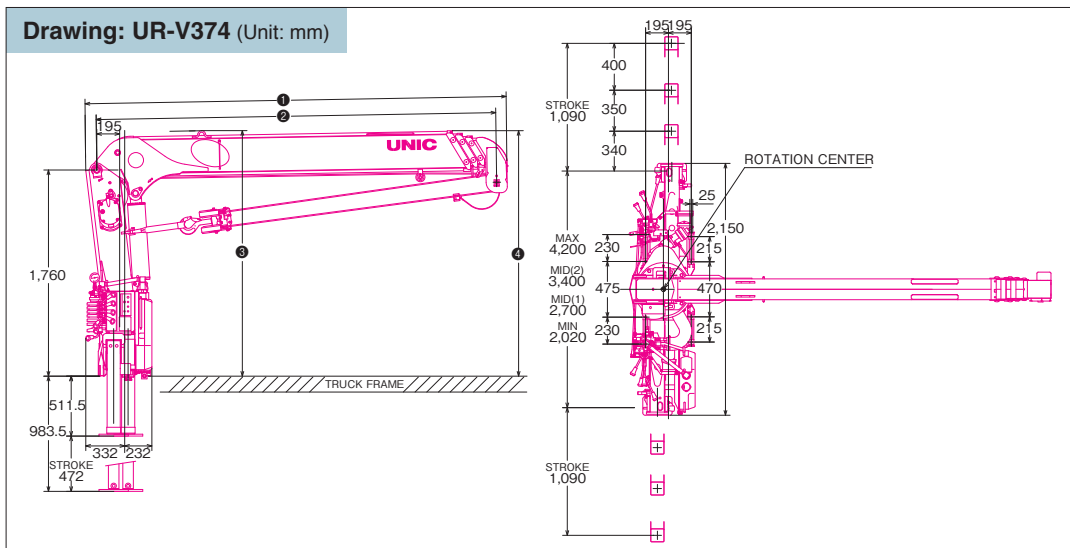

NOTE

1. Rated loads shown in the chart are based on the crane strength with the outriggers fully extended on a firm level ground and on the actual working radius including the deflection of boom.
2. The weights of hook (66 Lbs. / 30 kg.), slings, and any accessories attached to the boom or headline must be deducted from the above capacities in the chart.
3. Capacities shown must reduce in accordance with vehicle weight and loaded condition of truck, crane mount-in position, and operating speed.
4. The figures in relation to the speed are on the basis of no-load running at rated oil flow conditions.
5. In accordance with our policy of constant product improvement, all specifications are subject to change without notice or obligations.



Crane Mounting Dimensions				
Crane Model	①	②	③	④
UR-V376	3,814	Min. 3,630 ~ Mid. 5,850 ~ 8,040 ~ 10,230 ~ 12,420 ~ Max. 14,610	2,114	2,212
UR-V375	3,724	Min. 3,540 ~ Mid. 5,780 ~ 7,980 ~ 10,140 ~ Max. 12,300	2,136	2,134
UR-V374	3,594	Min. 3,410 ~ Mid. 5,650 ~ 7,825 ~ Max. 10,000	2,095	2,095
UR-V373	3,494	Min. 3,310 ~ Mid. 5,550 ~ Max. 7,700	2,092	2,095

FURUKAWA UNIC CORPORATION

3-14, Nihonbashi Muromachi 2-chome, Chuo-ku, TOKYO 103-0022 JAPAN

Phone: (81-3) 3231-8613 / Facsimile: (81-3) 3231-8261

URL <http://www.furukawaunic.co.jp/>